



REVISIONS		
REV	DESCRIPTION	DATE
A0	RELEASE FOR MANUFACTURE	2023. 6. 28


P1




FRONT VIEW
正面视图

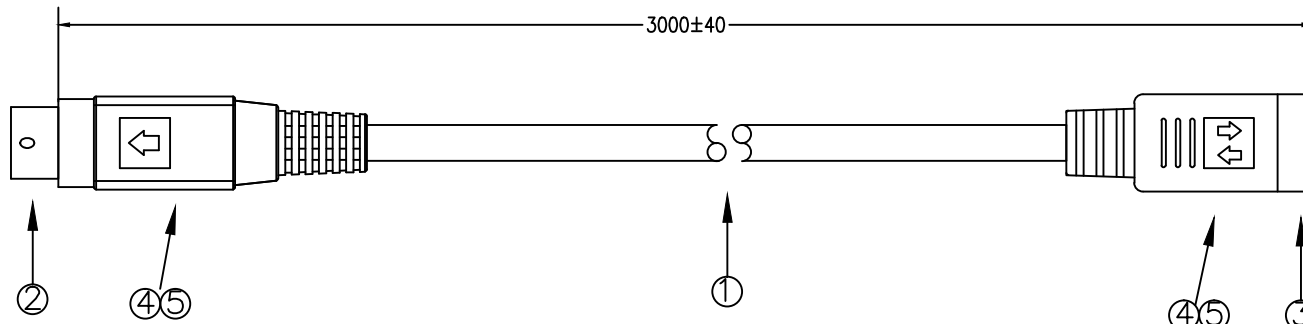

P2




FRONT VIEW
正面视图

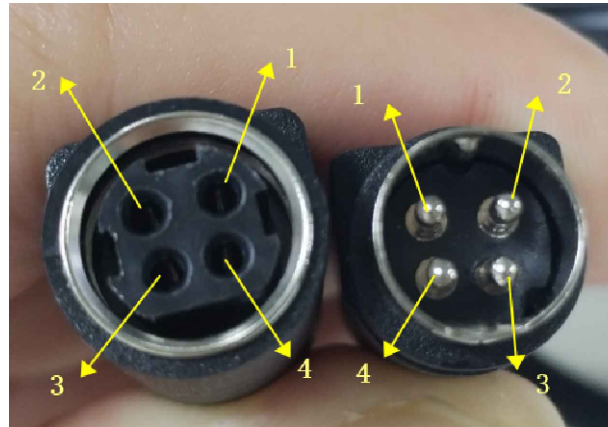

PIN CONNECTION	
P1	P2
1	1
4	4
2	2
3	3

红RED +
黑BLACK -



PACKAGE: PE bag
PE 袋独立包装

- TEST:
- 1)100% OPEN & SHORT TESTING
 - 2)INSULATION RESISTANCE :<300M ohm(Min)
 - 3)VOLTAGE: 300VDC/10mS
 - 4)CONFORM TO THE REQUIREMENTS OF THE ROHS

模具: 内79# 公249# 母80#

⑤	MOLD	PVC 45P COLOR: BLACK PVC 黑色外模	15G
④	MOLD	LDPE COLOR: WHITE PE内模	15G
③	CONN	POWER DIN 4PIN FEMALE NICKEL PLATED 中4P镀镍母头	1
②	CONN	POWER DIN 4PIN MALE NICKEL PLATED 中4P镀镍公头	1
①	CABLE	UL2464 18AWG*2C COPPER PVC COLOR: BLACK UL2464 18awg*2c 过粉黑色线	3000
NO	MATERIAL	DESCRIPTION	Q'TY
BILL OF MATERIAL			

GENERAL TOLERANCE	TITLE:
DIMENSION X.X ±0.30 X.XX ±0.10 X.XXX ±0.05	POWER DIN 4PIN EXTENSION CABLE
ANGLE ±5°	CUS NAME:
	P/N: 2306281030
	CUS

深圳市旭轩科技有限公司 SHENZHEN XUXUAN TECHNOLOGY CO., LTD.				
DRAW		CHECK		APPROVED
SHAN		Amanda		
REV	A0	UNITS	mm	SHEET: 10F1